



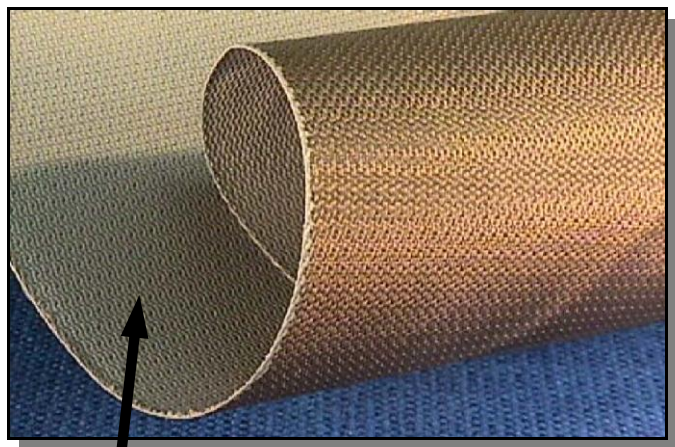

EJ 1650 Description: This PTFE/fiberglass composite is designed for challenging insulation jacketing applications.

- ⇔ **Successfully used in insulation jacketing service since 1985.**
- ⇔ **Special coating technology for industrial fabrication.**
- ⇔ **Severe chemical and temperature exposure capabilities.**
- ⇔ **Variations engineered upon request.**
- ⇔ **Easily sewn.**
- ⇔ **Flame retardant.**

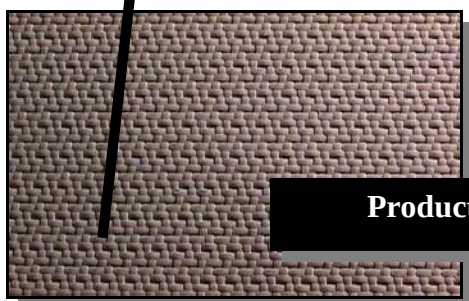

Product Close-up



Special Colors Available

EJ 1650 Properties:

<i>Upper Use Temperature:</i>	550°F (287°C) Continuous Service
<i>Weight:</i>	16.5 oz/yd ² (560 g/m ²)
<i>Thickness:</i>	0.017 " (0.43 mm)
<i>Width:</i>	60" (1524 mm) Nominal
<i>Tensile Strength (Warp):</i>	410 lbs/in (3664 N/50 mm)
<i>Tensile Strength (Fill):</i>	355 lbs/in (3173 N/50 mm)

This information is supplied in good faith and is based on information currently available. Firwin makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS,OR USE FOR A PARTICULAR PURPOSE,OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE,unless expressly set forth herein.