



BLANKET INSULATION 15080*

MW 1200

INSULATION 40 42 00**

PROCESS PIPING & EQUIPMENT

Technical Product Information**General Product Information:**

Firwin products are mineral wool fibre insulations made from basalt rock and slag. This combination results in a noncombustible product with a melting point of approximately 2150°F (1177°C), which gives it excellent fire resistance properties. Firwin mineral wool is a water repellent yet vapour permeable material.

Description & Common Applications:

The MW 1200 product is a flexible faced industrial blanket mineral wool insulation that is lightweight, water repellent, fire resistant and sound absorbent. MW 1200 is used to insulate surfaces such as pipes, vessels, boilers, furnaces, structural members and irregularly shaped mechanical equipment.

Compliance and Performance:

ASTM C 553 Mineral Fiber Blanket Thermal Insulation
City Of Los Angeles Approval

Type VII, Complies
RR 25444

Fire Performance:

ASTM E 136 Behaviour of Materials at 750°C (1382°F)
CAN4 S114 Test for Non-Combustibility
ASTM E 84(UL 723) Surface Burning Characteristics

CAN/ULC S102 Surface Burning Characteristics

Non-Combustible
Non-Combustible
Flame Spread - Passed
Smoke Developed - Passed
Flame Spread - Passed
Smoke Developed - Passed

Maximum Service Temperature:

ASTM C 411 Hot Surface Performance

In Compliance with
ASTM C612 @ 1200°F(650°C)

Dimensional Stability:

ASTM C 356 Linear Shrinkage

1.49% @ 1200°F (650°C)

Moisture Resistance:

ASTM C 1104 Moisture Sorption

0.01%

Thermal Resistance:

ASTM C 518 (C 177) R-value/inch @ 75°F
RSI value/25.4 mm @ 24°C



4.2 hr.ft².F/Btu***
0.74 m²K/W

Corrosive Resistance:

ASTM C 665 Corrosiveness to Steel
ASTM C 795 **** Stainless Steel Stress Corrosion Specification as per Test
Methods C871 and C692: U.S. Nuclear Regulatory Commission,
Reg. Guide #1.36: U.S. Military Specifications MIL-I-24244 (all
versions including B and C)

Pass
Conforms

*MASTER FORMAT 1995 EDITION **MASTER FORMAT 2004 EDITION
*** at the time of manufacturing

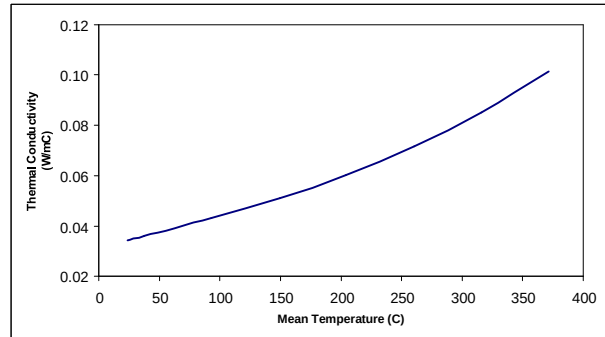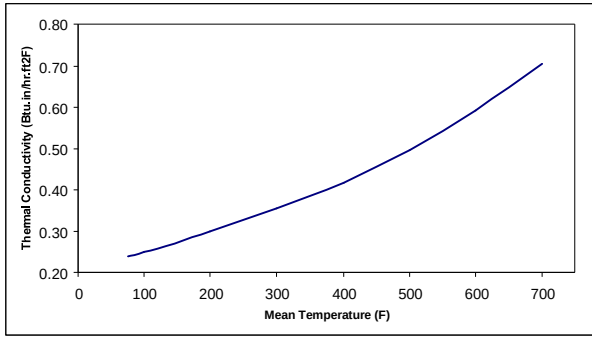

Density:

ASTM C 612-93 – Nominal	8.0 lbs/ft ³	128 kg/m ³
ASTM C 553 – Actual		
≥ 2" thickness	5.68 lbs/ft ³	91 kg/m ³

Available Facing:

- Black fibrous glass scrim for single and multi-layer applications
- Reinforced foil facing for single layer applications as special order only (minimum order quantities required).

Key Application Qualifiers:

- Flexibility
- Non-combustibility
- Low moisture sorption
- Fire resistant
- Excellent thermal resistance
- Does not rot or sustain vermin
- Does not promote growth of fungi or mildew
- CFC and HCFC free product and process
- Made from natural and recycled materials

Other Firwin Products:

Please consult Firwin for all your insulation needs. We have an extensive range of products for all applications from pipe insulation to commercial products to residential batts. Firwin invites all inquiries and will act promptly to service all of your requirements.

**** "Provisions for lot testing may

be required, consult manufacturer."

Note:

As FirwinCorp.. has no control over installation design and workmanship, accessory materials or application conditions, Firwin Corp.does not warranty the performance or results of any installation containing Firwin Corp's products. Firwin Corp's overall liability and the remedies

available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.

Firwin Corp. **225 Limestone Crescent, North York, ON M3J 2R1, Canada**
Fax: 416-745-0782 www.firwin.com

Tel: 416-745-9389
Tel: 1-877-347-9467

Revised: Sept. 25 , 2009
Supersedes: July 4, 2008